


**SPECIALTY
CHEMICALS**

DIMETHYL DISULFIDE, CH₃-S-S-CH₃ | CAS#: 624-92-0

Dimethyl Disulfide (DMDS) is a sulfiding agent which is used, along with a reducing agent such as hydrogen, to transform metal oxide species to a metallic sulfide crystalline phase in situ for hydrotreating catalysts. For in situ sulfiding, the reaction is performed inside the process unit for complete control and to achieve maximum catalyst activity and safe handling. DMDS can also be used as a passivation agent to reduce coking in reformer units.

PACKAGING

DMDS is available in bulk (railcars, tank trucks and ISO containers) or packaged containers including 250 gallon returnable steel totes, 57 gallon returnable steel cylinders or 54 gallon drums.

ADVANTAGES

Compared to other sulfiding agents, DMDS has the highest sulfur content, which reduces the amount of product required for converting oxides to active metal sulfides. Thermally stable with low viscosity, DMDS is suitable for gas- or liquid-phase injection. It begins to decompose to H₂S at low temperatures, so the risks of reducing the metal oxides prior to sulfiding are eliminated. In addition, DMDS also decomposes in two steps, further minimizing the risk of temperature excursions during sulfiding (see Figure 1).

SAFETY AND HANDLING

Due to its low vapor pressure, DMDS is a safe product to handle at high ambient temperatures. However, it also has a low flash point and should be handled as a flammable material—stored under inert conditions and away from potential ignition sources. DMDS is a dermal, oral and toxic inhalation material, as well as a marine pollutant. It also may have a slightly unpleasant odor. DMDS generates methane during the sulfiding operation, which if not handled properly, may require purging and undesired SO_x emissions. DMDS it is not soluble with water, but will solubilize in both amines and ketones. DMDS is compatible with both carbon and stainless steel as long as excess water is not present.

Brass and copper connections are not recommended. Gaskets should be Teflon since DMDS tends to attack rubber and nitrile elastomers. Household bleach (not pure bleach) or Liquid Alive® bacteria is suggested for any necessary clean up. Please reference the Material Safety Data Sheet for additional handling and safety recommendations. The PHMSA mandates that any personnel governed by the USDOT who handle DMDS must be in compliance with the safety requirements stipulated under 49 CFR Parts 177.834.

PERFORMANCE DATA

SULFIDING AGENT PROPERTIES

PROPERTY	DMDS	TBPS 454	DMS
Sulfur %(wt)	68	54	52
Density (lbs/gal)	8.9	9.0	7.11
Freezing Point (°F)	-121	-54	-145
Boiling Point (°F)	229	N/A	99
Flash Point	59	217	-36
Vapor Pressure at 70°F (PSI)	0.45	<0.1	8.1
Decomposition Temperature* (°F)	392	320	482
Auto Ignition Temperature (°F)	575	437	403
Viscosity at 70(°F) (mPa.s)	0.62	12.8	.285


**In the presence of H₂ and Catalysts*

PERFUMED DMDS

Methyl Mercaptan and Dimethyl Sulfide are the two impurities that cause odor in DMDS. Both of these impurities are typically <100 ppm in Chevron Phillips Chemical's DMDS. A high purity DMDS eliminates the need to add perfume to mask the odor of the product.

PRODUCT SAFETY INFORMATION

Safety Data Sheets are available upon request and on our website at: <http://www.cpchem.com/specialtychemicals>



10001 Six Pines Drive
The Woodlands, TX 77380
www.cpchem.com/specialty

U.S., Canada & Latin America: 1-800-858-4327
Europe, Africa & Middle East: +32 2 689 1211
Asia Pacific: +65 6517 3100



**SPECIALTY
CHEMICALS**


APPLICATION GUIDELINES

For in situ sulfiding of hydrotreating catalysts, the catalysts will typically be dried and then wetted with feed material at 300°F or below. DMDS injection begins as the temperature approaches 400°F, with the reactor held in a range of 400–420°F until H₂S breakthrough occurs.

Breakthrough is indicated when the H₂S level of the recycle gas exceeds 5,000 ppm. The reactor temperature can then be raised to the secondary sulfiding plateau, which is typically in the range of 620–670°F. The temperature will be held at this level for at least 4 hours until the sulfiding process is complete. A secondary H₂S breakthrough may occur at this point, with H₂S levels rapidly exceeding 20,000 ppm (see Figure 2).


For reformer units, a small amount of DMDS is continuously injected, generally about one gallon per day, directly into the feedstock. The DMDS will convert to H₂S, which will mitigate the creation of coke.

FIGURE 1. DECOMPOSITION OF DMDS IN THE PRESENCE OF A CATALYST

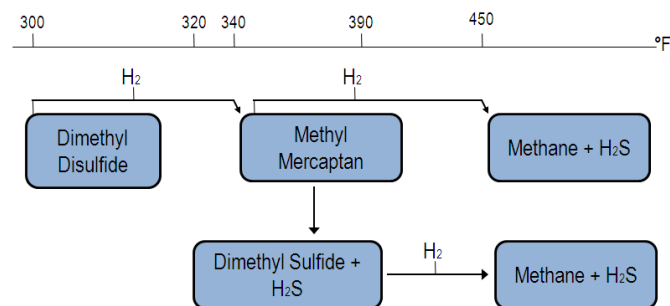

Actual results may vary depending on unit condition and pressures

FIGURE 2. TYPICAL FEED SULFIDING PROCEDURE

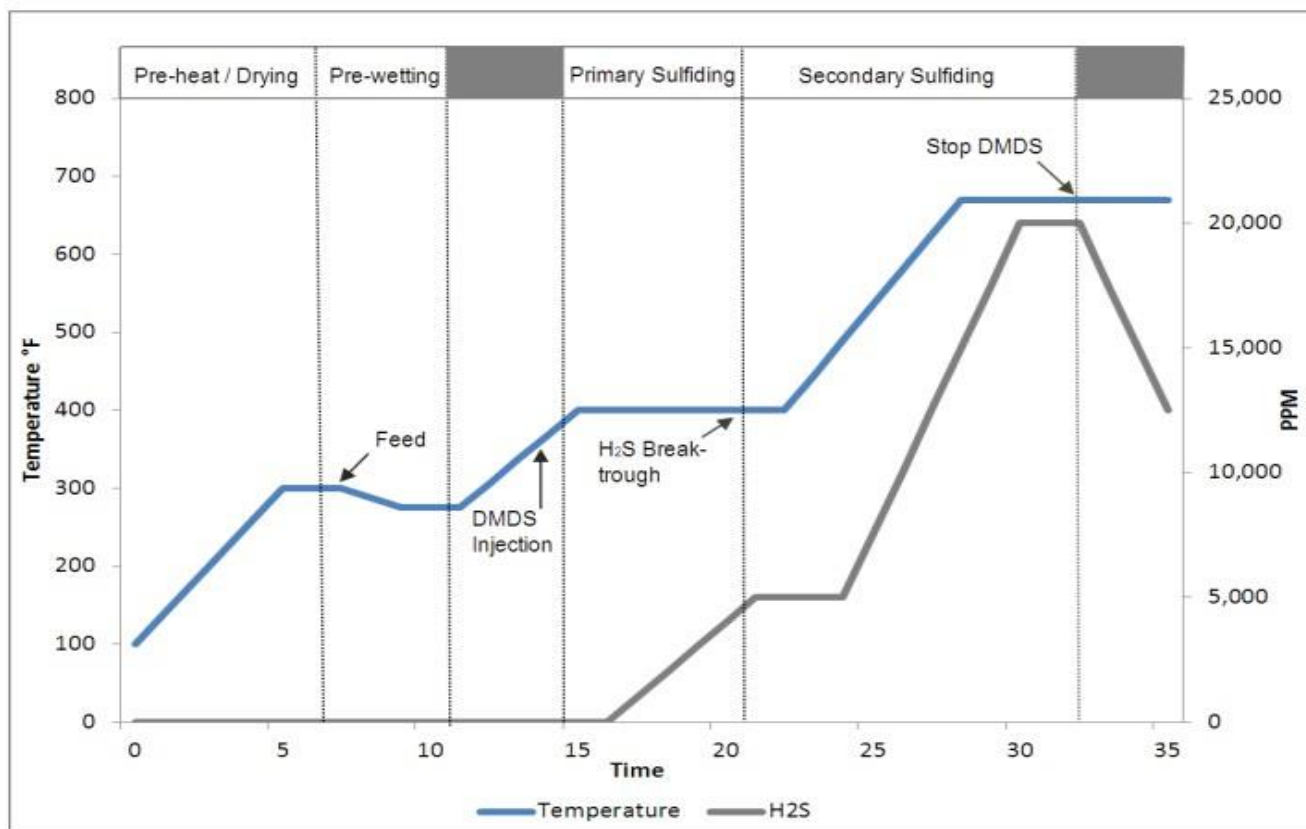

10001 Six Pines Drive
The Woodlands, TX 77380
www.cpchem.com/specialty

U.S., Canada & Latin America: 1-800-858-4327
Europe, Africa & Middle East: +32 2 689 1211
Asia Pacific: +65 6517 3100

Before using this product, the user is advised and cautioned to make its own determination and assessment of the safety and suitability of the product for the specific use in question and is further advised against relying on the information contained herein as it may relate to any specific use or application. It is the ultimate responsibility of the user to ensure that the product is suited and the information is applicable to the user's specific application. Chevron Phillips Chemical Company LP does not make, and expressly disclaims, all warranties, including warranties of merchantability or fitness for a particular purpose, regardless of whether oral or written, express or implied, or allegedly arising from any usage of any trade or from any course of dealing in connection with the use of the information contained herein or the product itself. The user expressly assumes all risk and liability, whether based in contract, tort or otherwise, in connection with the use of the information contained herein or the product itself. Further, information contained herein is given without reference to any intellectual property issues, as well as federal, state or local laws which may be encountered in the use thereof. Such questions should be investigated by the user. Additional Information on the health and safety aspects of our product is listed in the SDS of the product.